

# Butyl Mastic Joint Sealant

Direct from manufacturer

## For Use in Concrete Joints



- Meets ASTM C-990
- Seals quickly and effectively
- Excellent adhesion to surfaces
- Large working temperature range
- Stays permanently bonded yet maintains flexibility
- Non-toxic
- Will not oxidize or shrink
- If required can have a root inhibitor mixed into compound



## How to Apply

1. Brush down sealing surfaces to remove foreign material.
2. Ensure sealing surface is free of moisture.
3. Press the tip of the exposed sealant against bottom of the jointing surface, then wrap the sealant around the joint and but the ends together.
4. Remove paper wrapper and couple the joint.
5. Wet or unusual conditions may require a primer.

## Various Profiles Available

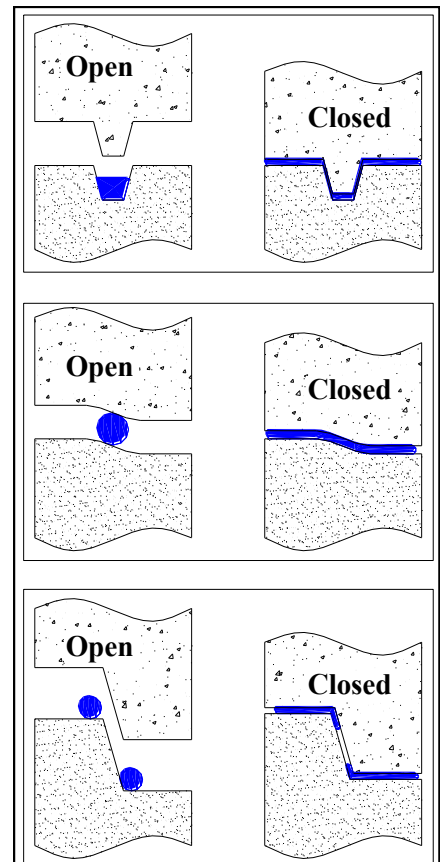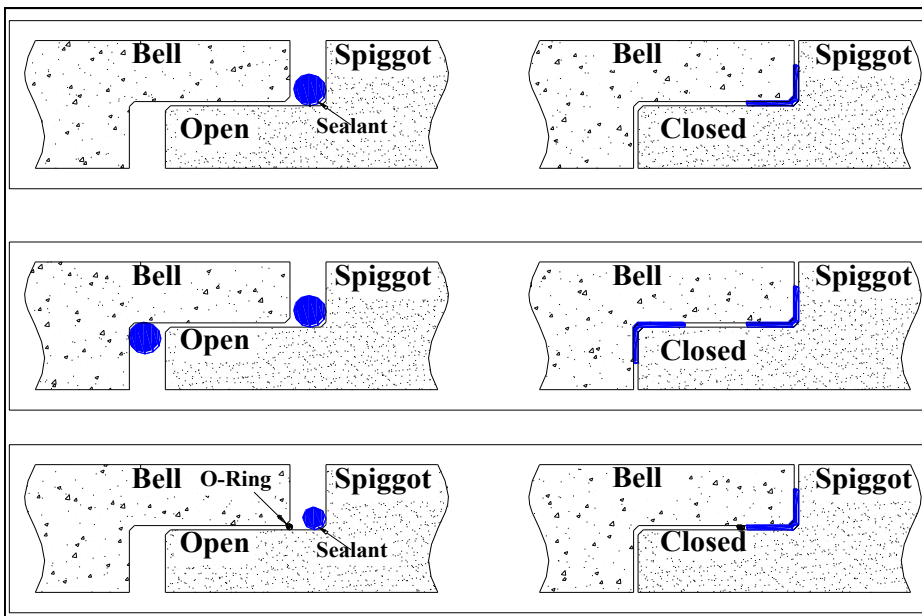

### C-Tech Rubber USA LLC

7206 Peppermill Parkway Phone: 843 552 4496  
 North Charleston SC 29418 Fax: 843 552 0040  
 USA Cell: 843 822 0664

Email: stevesuttie@homesc.com

### C-Tech Rubber Pty Ltd

17 Devon Road Ph: 61 2 9829 3022  
 Ingleburn NSW 2565 Fax: 61 2 9829 4085  
 Australia

Email: sales@ctech-rubber.com.au

