

MATERIAL SAFETY DATA SHEET:

Product Name: PL1 Pipe Lubricant
Date Issued: January 2020

Specification:

Usage: Water soluble pipe lubricant for joining pipes with rubber gaskets.

Description:

- Usage: Water soluble pipe lubricant for joining pipe and fittings with rubber, synthetic rubber or plastic gaskets. NON-TOXIC. For use on PW DWF and sewer systems. Adheres to wet and dry surfaces.
- Useable from - 10°C to 80°C.
- Does not support bacterial growth.
- Contains a biocide free of AOX and VOC.
- Contains no petroleum based substances.
- Contains no known carcinogens.

Properties:

SG: 0.970	PH: 7.6 to 8.1
Flash point: Nil	Viscosity: Gel
Flammability: Nil	Boiling Point: 109°C
Solubility in water: Complete	Appearance: Off white paste.
Odour: Mild	Reactivity: Nil

Health Hazard Information:

Acute effects


Swallowed: Non toxic, may irritate stomach.

Eye: Will irritate eyes.

Inhaled: Nil

Safety:

- In case of contact with eyes, flush with water for 15 minutes.
- Rinse off skin with water.
- If irritation persists, consult physician.
- If swallowed give water and milk. Do not induce vomiting.
- Not an irritant if inhaled.
- Toxicity low.
- Advice to doctor, treat symptomatically.

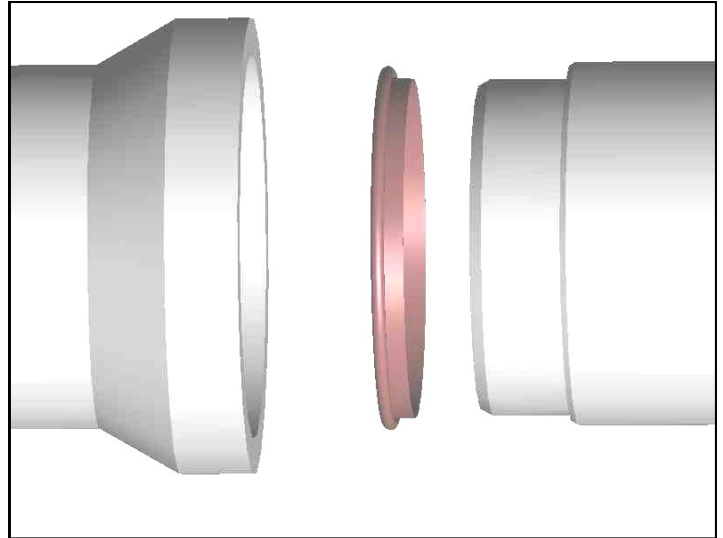

Safe Handling:

Transport: No special requirements.

Handling: Use gloves when applying to gaskets.

Storage: No special requirements.

Spills: Clean up with scoop or rags and wash with water.

Disposal: Dispose to local authorities requirements.

Fire Hazard: Nil

Explosion Hazard: Nil

Other Information

Contact:

Laboratory on (02) 9829 3022

C-Tech Rubber USA LLC

7206 Peppermill Parkway	Phone: 843 552 4496
North Charleston SC 29418	Fax: 843 552 0040
USA	Cell: 843 822 0664

Email: stevesuttie@homesc.com

C-Tech Rubber Pty Ltd

17 Devon Road	Ph: 61 2 9829 3022
Ingleburn NSW 2565	Fax: 61 2 9829 4085
Australia	

Email: sales@ctech-rubber.com.au

